

# Float Switch Shield Kit

Models: T500, T500e, Speed Scrub 500



This kit is intended for models equipped with the Smart-Fill Automatic Battery Watering and/or Severe Environment systems manufactured before December 2018. The kit is designed to prevent a false indication of an empty ABW and/or SE tank caused from the magnetic field between the float switch and brush motor.

## INSTALLATION INSTRUCTIONS:

Installation Time: .5 Hours

Tools Required: Adjustable wrench

### 9018447 - Kit Contents




Part No.	Description	Qty.
1243106	Plate, Shield, Switch	1



**FOR SAFETY:** Before servicing machine, stop on level surface, turn off machine and remove key.

To install the float switch shield, empty the ABW and/or SE tank. Remove the nut on the float switch and position the shield between the tank and nut as shown. Re-tighten nut.

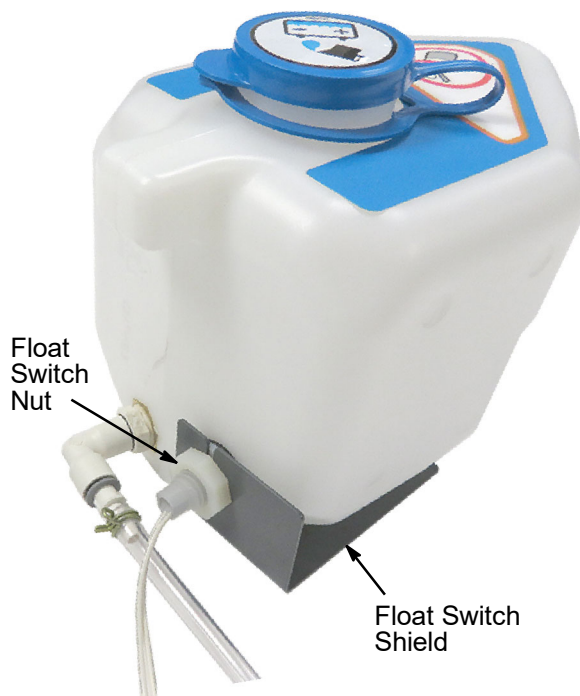

(ABW tank shown)